



SENNHEISER

HM 200

Headset microphone

Model: HM 200 (Beige 3-Pin)
HM 200 (Black 3-Pin)
HM 200 (Silver 3-Pin)



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 10/25, 587496/A03



Quick Guide

Kurzanleitung

Guide de démarrage rapide

Guida rapida

Instrucciones resumidas

Instruções resumidas

Beknopte gebruiksaanwijzing

Krótko instrukcja obsługi

Snabbguide

Kort vejledning

Pikaohje

Σύντομες οδηγίες

Kısa Kılavuz

Краткая инструкция

快速指南


快速使用指南

クイックガイド


요약 안내서

www.sennheiser.com/documentation

In the box

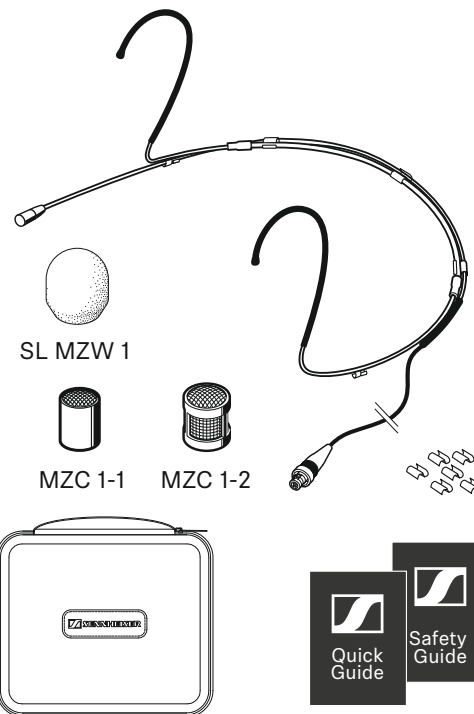

Setup

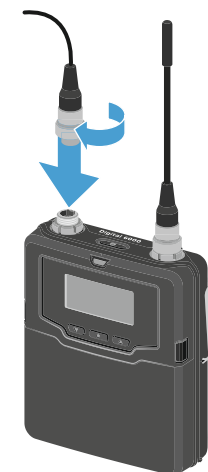

*not included

Setup

Frequency caps

MZC 1-2




+ 4 dB

MZC 1-1



+ 2 dB


SL MZW 1




- 10 dB

Windshield


Setup

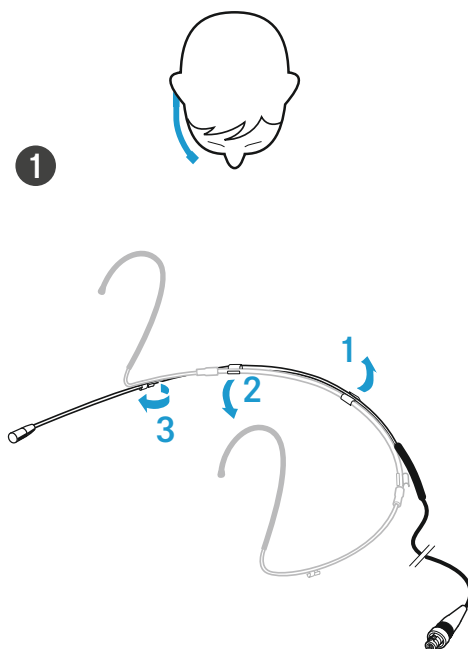


2

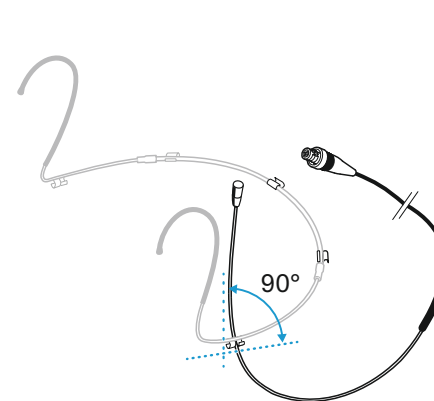

3

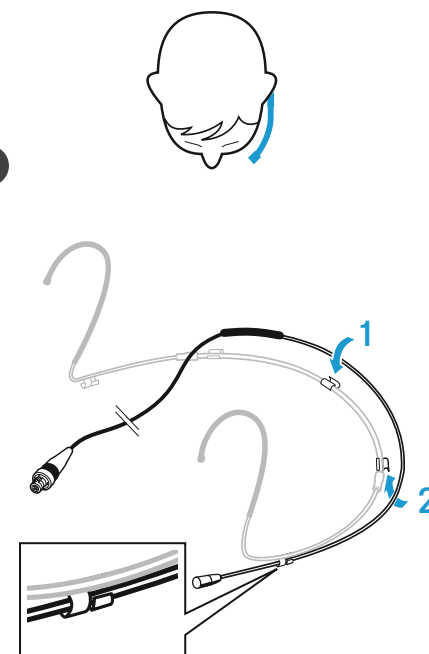


Cleaning

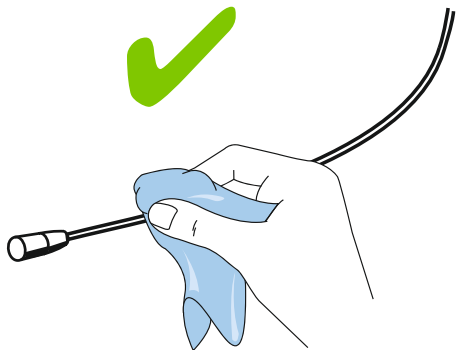

Specifications

Frequency response	20 – 20,000 Hz ± 3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Sensitivity	5 mV/Pa ± 3 dB
Diameter of mic capsule	3.3 mm
Max. sound pressure level	143 dB
Equivalent noise level	27 dB(A)
Supply current	approx. 240 μ A
Power supply	4.5 – 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 95 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight	approx. 13 g
Connector	3-Pin connector

Polar pattern

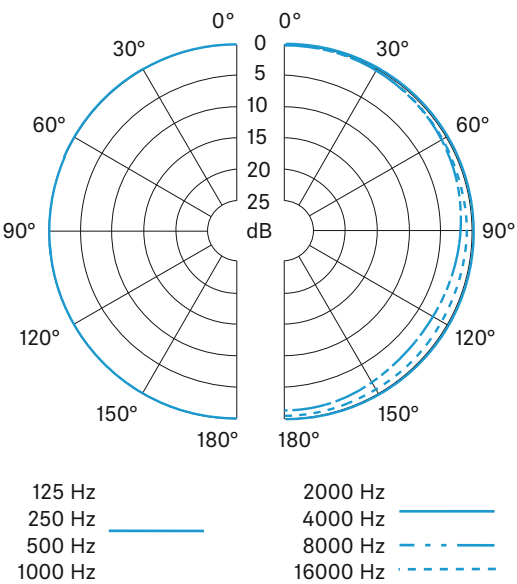

Frequency response

