



MKE 400



Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
クイックガイド
퀵 가이드


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Publ. 03/25, 587402/A04

SENNHEISER

In the box

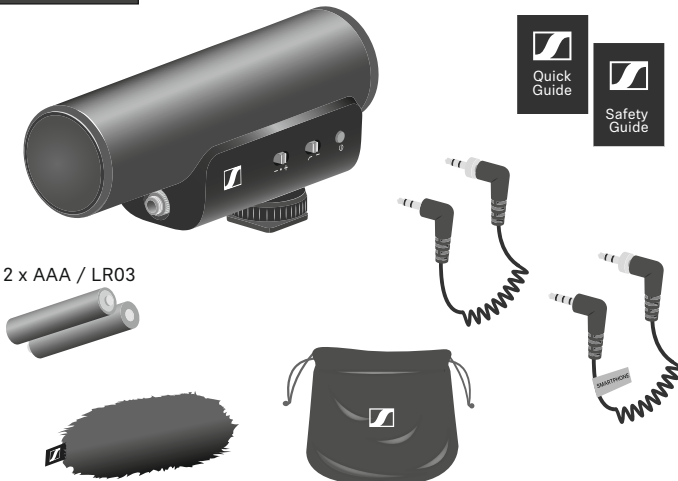


Battery

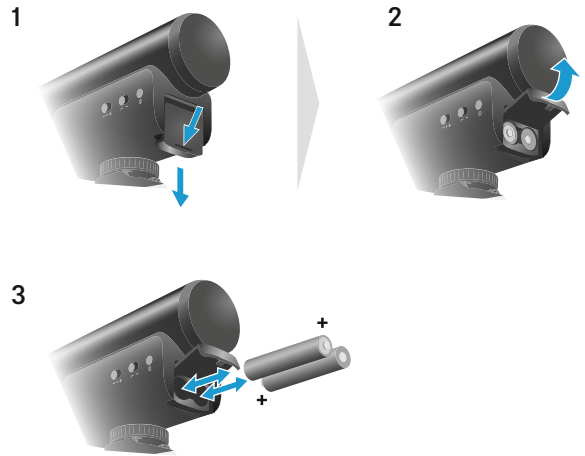

Setup



On/Off

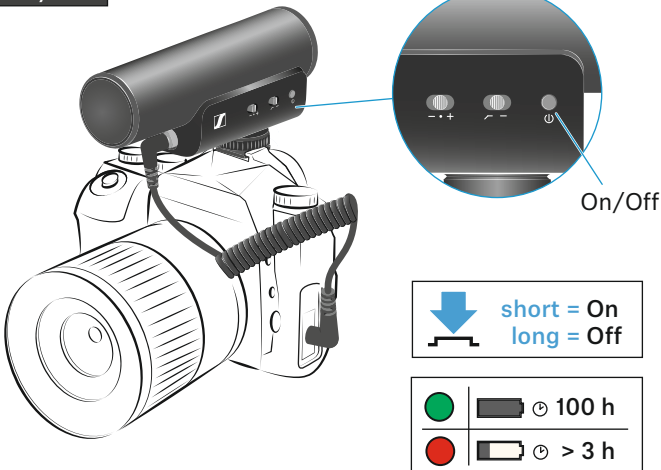

Auto On/Off

Connect MKE 400 to the camera
for automatic On/Off

Camera: On


MKE 400: On

Camera: Off

MKE 400: Off




Low cut / Microphone gain

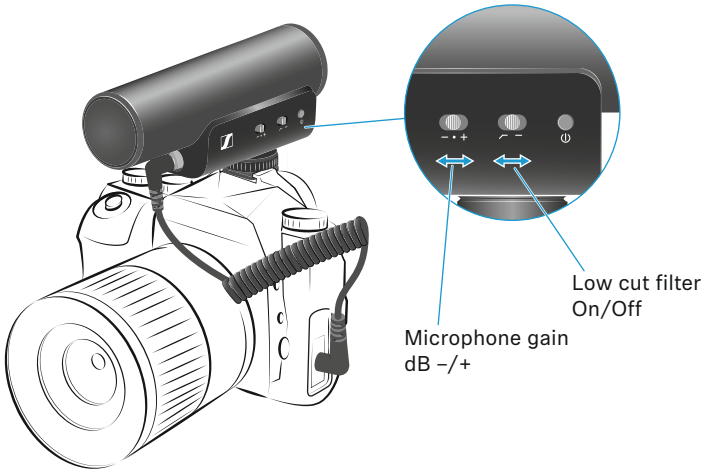

Microphone gain

	-20 dB
	0 dB
	+20 dB



Low cut filter

	On
	Off

Specifications

Microphone


Transducer principle	pre-polarized condenser
Pick-up pattern	super cardioid
Frequency response	50 to 20,000 Hz
Sensitivity at 1 kHz	-23 / -42 / -63 dB V/Pa
Max. SPL at 1 kHz	132 dB SPL
Power supply	battery (2x AAA / LR03 size, 1.5 V)
Auto power function	plug-in power required (2 – 10 V)
Operating time	>100 h*
Low battery indicator	>3 h of remaining operating time
Microphone output	3.5 mm jack, screwable
Dimensions	126 x 67 x 37 mm
Weight	93.5 g

* less when headphone is connected

Headphone output

Headphone output	3.5 mm jack
Min. headphone impedance	16 Ω
Output power at 1 kHz	105 mW (Headphone impedance 16 Ω) 70 mW (Headphone impedance 32 Ω)
Total harmonic distortion	<1 % at 50 mW
Digital volume control	8 steps ± 6 dB

Cleaning

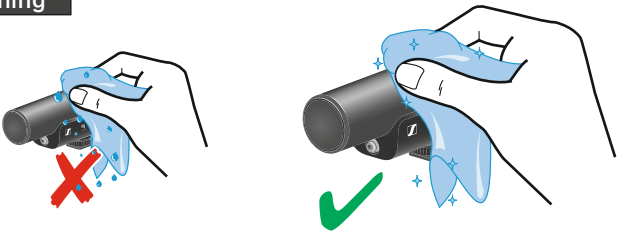

Headphone




Headphone
Volume -/+


Headphone
Output, 3.5 mm jack



Accessory

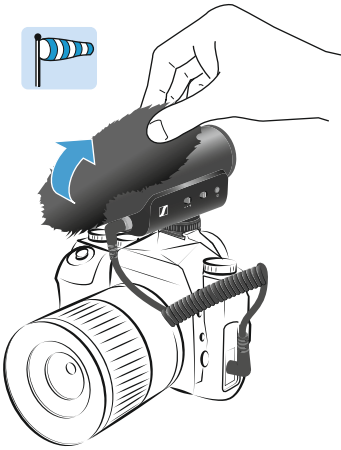

Smartphone



flight mode recommended

Polar pattern / Frequency response

