



ATS99

Hypercardioid Dynamic Microphone

**/ A Premium Microphone Designed for Performance;
The Forward Thinking ATS99 Offers Excellent
Response and Enhanced Mids and Lows for a Modern
Sound**

Overview



The ATS99 offers excellent response for clear capture of low to high frequencies, allowing vocalists to sing confidently across a broader range. Based on feedback from a number of vocalists, Audio-Technica designed this handheld microphone with close attention to detail to offer even greater freedom of expression, both physically and vocally, thanks to its broad range and its comfortable, easy-to-hold grip. The ATS99 eliminates as many technical obstacles as possible, allowing vocalists to give their full performance with confidence.

Features

- Enhanced Capture of Lower Frequencies at High Volumes
- Fast transient response with comfortable design
- Professional, dynamic handheld microphone ideal for live performances and various sound recording scenarios
- Built-in high-magnetic-force magnet and step-up transformer for enhanced capture of low-mid range sounds at high volume
- Extended frequency response for full-range reproduction of low to high frequencies
- Outstanding feedback resistance even under difficult monitoring conditions
- Hypercardioid construction minimises the capture of side noise, offering excellent performance in live music applications
- Internal shock mount structure for reduced handling noise
- Lightweight and easy to handle with a robust, fatigue-resistant machined aluminum body for increased durability

Included Accessories

- AT8470 stand clamp for 5/8"-27 threaded stands
- 5/8"-27 to 3/8"-16 threaded adapter
- Pouch

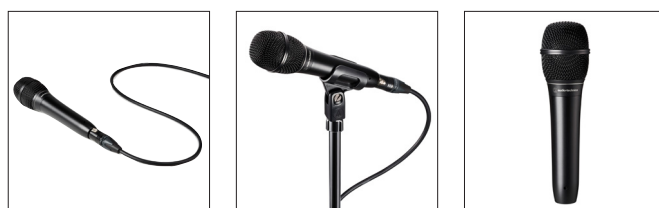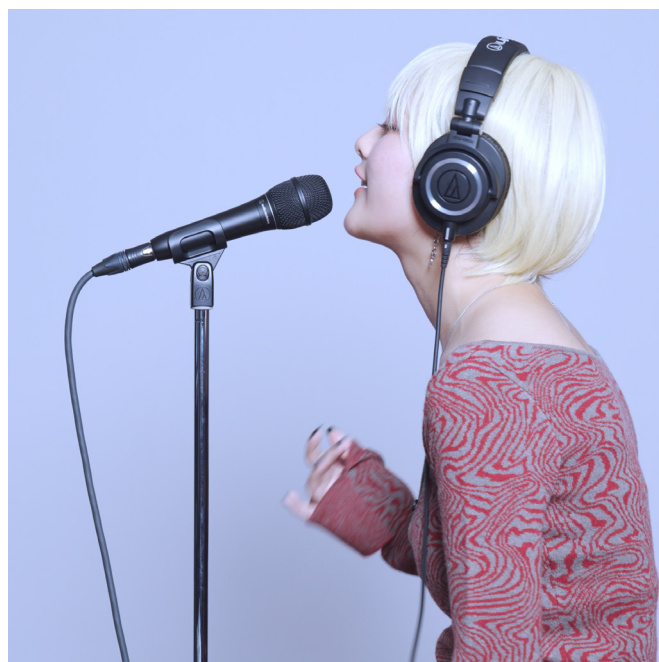

General Specifications

Element	Dynamic
Polar pattern	Hypercardioid
Frequency response	60 - 16,000 Hz
Open circuit sensitivity	-52 dB (0 dB=1 V/Pa, 1 kHz)
Impedance	600 ohms
Weight	262 g (9.2 oz)
Dimensions	181.5 mm (7.1") long, 50 mm (2.0") maximum body diameter
Output connector	Integral 3-pin XLR-M type
Included accessories	• AT8470 stand clamp for 5/8"-27 threaded stands • 5/8"-27 to 3/8"-16 threaded adapter • Pouch